


## OVERVIEW

*The proofer (or prover) provides uniform proofing with even flow system, precisely mixing heat and humidity to produce exceptional results. Proofer interior and exterior are constructed of stainless steel for years of heavy use. Heat and humidity levels can be adjusted independently, with EGO temperature controllers.*

Simple is the best!

Ease of Use Control Panel

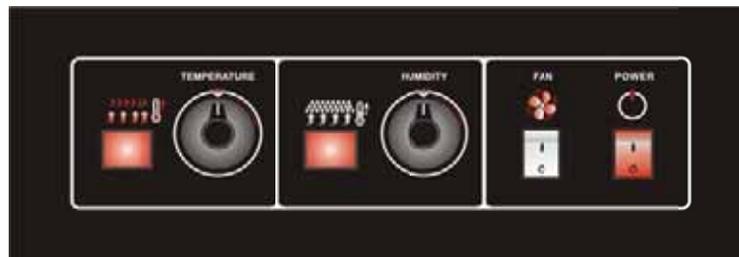

PF-1

Single Door



18 Tray Proofer for Tray



| <b>SPECIFICATIONS:</b> |  |
|------------------------|--|
| Voltages               | 220V/380V/415V 50/60HZ<br>Single Phase |
| Tray Capacity          | 46x76 46x72 or 40x60cm tray x 18       |
| Watts                  | 2KW                                    |
| Machine Dimension      | L=61xD90xH205CM                        |
| Shelf                  | Angle Runners:<br>66mm Spacing         |
| Weight                 | 120kg                                  |

**PF-2**  
**Double Door**  
**36 Tray Proofer**



| <b>SPECIFICATIONS:</b> |  |
|------------------------|--|
| Voltages               | 220V/380V/415V 50/60HZ<br>Single Phase |
| Tray Capacity          | 46x76 46x72 or 40x60cm tray x 36       |
| Watts                  | 2KW                                    |
| Machine Dimension      | L=117xD90xH205CM                       |
| Shelf                  | Angle Runners:<br>66mm Spacing         |
| Weight                 | 150kg                                  |