



2 DOORS COUNTER CHILLER

MODEL **KCC-C-2D-15**

✓ PRODUCT FEATURES

- Designed evaporator for easy servicing with zero down time.
- Forced air refrigeration system ensures effective air circulation.
- CoolSmart controller with clear digital display is designed for easy operation.
- Automatic fan cut out switch avoids cool air loss and reduces energy consumption.
- Automatic defrost and vaporizing defrost water
- Hydrophilic coating for evaporator.
- Food safe 430 grade stainless steel external and 304 grade stainless steel interior.
- Galvanized steel exterior back and base.
- Thick Cyclopentane insulation with low GWP of 11 and ODP Zero.
- Anti-condensation door heaters.
- Over 90° door opening allows easy loading and stock checking.
- Removable magnetic door gasket.
- Adjustable racking system.
- 4 pcs shelf supporters and 1 pcs PE Coated Shelves.
- Hygienic one-piece dished base with round corners.
- Interior Led lighting (2700K).
- 150Hmm adjustable legs to ensure stability on an uneven floor.
- Designed and engineered to operate up to 43°C ambient.
- Environmentally friendly R134a Refrigerant.
- HACCP Compliant.
- Fail-safe device for thermocouple.
- Hi-Lo Alarm.
- Adequates ventilation required.

CONTROLLER

- **CoolSmart Controller**
Clear digital display for easy operation.
- **Energy Saving**
Automatic fan cut-out switch. Automatic defrost and vaporizing defrost water.
- **Safety Features**
Hi-Lo Alarm.

STAINLESS STEEL

- **Interior 304**
High-grade 304 stainless steel interior.
- **Exterior 430**
Food-safe 430 grade stainless steel.
- **Round Corners**
One-piece dished base with round corners.
- **Door Heaters**
Anti-condensation door heaters.

FOAM & DOOR GASKET

- **High-Efficiency Foam**
Thick Cyclopentane insulation (Low GWP (11), Zero ODP).
- **Removable Magnetic Door Gasket**
Ensures an airtight seal and allows for easy cleaning. Replacement when needed.

COMPRESSOR

- **Heavy Duty**
Designed to operate up to 43°C ambient temperature.
- **Forced Air**
Forced air refrigeration system for effective circulation.
- **Evaporator**
Hydrophilic coating with zero downtime design for servicing.
- **R134a Refrigerant**
Environmentally friendly R134a.



SPECIFICATIONS


MODEL

KCC-C-2D-15


Power Supply	1 Phase 220-240V -50hz
Amprage	3
External Dim	1500 x 700 x 850
Internal Dim	1125 x 570 x 580
Capacity (L)	372
Temp	+1/ +4 °C
Compressor <i>(brand power supply)</i>	Ebraco
Shelf	2
Operating Conditions	Operate up to 43°C ambient
Packing Dim	1550 x 750 x 900
Weight (net & appr) Kg	120/150
Leg	SUS adjustable 125-155mm
Gas	R134A
Defrost System	Air Defrost/Off-cycle
Insulation Foam	Polyurethane Foam
Defrost Control	Microprocessor Control
Heat Rejection	485
Plug Cord	Plug with Earth Wire
Heat Rejection	None




SHOP DRAWINGS

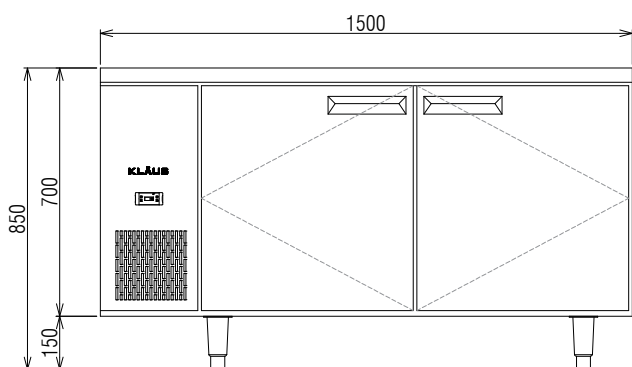

ELEVATION

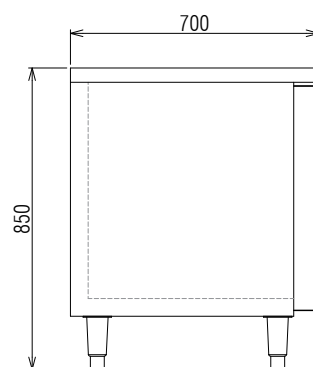

SIDE VIEW

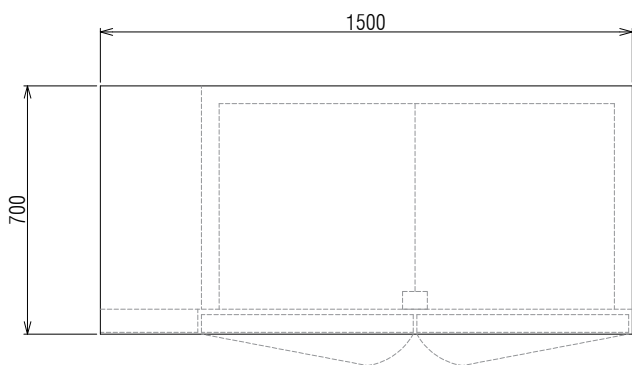

PLAN