Project _____

Item # _____


Quantity _____

Glo-Ray® *Designer* Infrared Aluminium Strip Heaters with Lights


Models:

GR2AL -18, -24, -30, -36, -42, -48, -54, -60, -66, -72, -84
GR2AHL-18, -24, -30, -36, -42, -48, -54, -60, -66, -72, -84

Hatco Glo-Ray® Infrared Aluminum *Designer* Strip Heaters with lights safely keep all hot foods at optimum serving temperatures longer. This modern design is ideal for front-of-the-house use. Units are offered in continuous housings up to 84" (2134 mm), are available in *Designer* colors to match most décors.

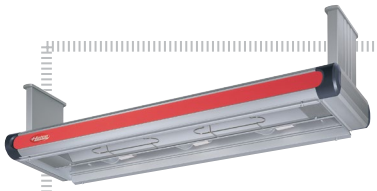

GR2AHL-36
Optional Overhead Mounts, Designer color Inset Panels (black corner Caps Standard)



GR2AHL-24
with standard Designer non-adjustable Stands, black Corner Caps and Optional Sneeze Guards, Designer color Inset Panels

Standard features

- Pre-focused heat maintains safe serving temperatures longer without continuing to cook the food
- Sturdy continuous aluminum housings eliminate sagging
- Widths from 21.5" to 87.5" (546 X 2223 mm)
- 14" (356 mm) *Designer* non-adjustable Stands Standard
- Available in a variety of models, configurations, colors and accessories to provide unlimited flexibility
- Designer colors and inset panels allow the unit to match surrounding décor
- Black corner caps and inset panels standard
- Standard coated shatter-resistant incandescent or optional halogen lights enhance product displays while safeguarding food from bulb breakage
- Optional sneeze guards
- Remote control installation is required – must chose RMB
- Additional reflector styles and lower wattage elements available, consult factory for more information

Options (available at time of purchase only)

Housing – 12" (305 mm)
Designer Color – Aluminum finish Standard⊗
☐Warm Red ☐Black ☐Gray Granite ☐White Granite
☐Navy Blue ☐Hunter Green ☐Antique Copper

Inset Panel *Designer* Color – Black Standard⊗
☐Warm Red ☐Black ☐Gray Granite ☐White Granite
☐Navy Blue ☐Hunter Green ☐Antique Copper

Corner Caps *Designer* color, Black standard†
☐Dark Gray

☐No Control (GR2AL only) – Requires selection of RMB2-xx control

Remote Box, *Designer* Color – Aluminum finish Standard⊗
☐Warm Red ☐Black ☐Gray Granite ☐White Granite
☐Navy Blue ☐Hunter Green ☐Antique Copper

Sneeze Guards
☐7.5" (191 mm) – One Side ☐7.5" (191 mm) – Two Sides
☐14" (356 mm) – One Side ☐14" (356 mm) – Two Sides

Designer Non-Adjustable Stands – 14" (356 mm) *Designer* Stand standard
☐10" (254 mm) ☐12" (305 mm) ☐16" (406 mm)
Designer Color – Aluminum finish Standard⊗
☐Warm Red ☐Black ☐Gray Granite ☐White Granite
☐Navy Blue ☐Hunter Green ☐Antique Copper

☐Overhead Mounts 4" (102 mm) in lieu of 14" (356 mm) standard Stands
Designer Color – Aluminum finish Standard⊗
☐Warm Red ☐Black ☐Gray Granite ☐White Granite
☐Navy Blue ☐Hunter Green ☐Antique Copper

☐No Bulbs

☐Extra Lamps – Installed (max. two per ft. less one – one per ft. is standard)

Extended Power (Electrical) Leads
☐1'-5' (305-1525 mm) ☐6'-10' (1829-3048 mm)
☐11'-15' (3352-4572 mm) ☐16'-20' (4877-6096 mm)

Accessories

Chef LED Light Bulb – Bulbs must be rotated down
120V
☐3000K Warm halogen ☐4000K Cool fluorescent
230V – CE for input voltages above 200V
☐3000K Warm halogen ☐4000K Cool fluorescent

⊗ Non-standard color are non-returnable

NOTE: Install Remote Box outside Heat Zone or damage will occur.

For operation, location and safety information, please refer to the Installation and Operating Manual.

ANSI/NSF 4

MADE IN THE USA


HATCO CORPORATION | P.O. Box 340500 Milwaukee, WI 53234-0500 U.S.A. | (414) 671-6350

www.hatcocorp.com | customerservice@hatcocorp.com | Find a Hatco Rep | Image Library | Document Library


Glo-Ray® Infrared *Designer* Aluminum Strip Heaters with Lights

Models: GR2AL -18, -24, -30, -36, -42, -48, -54, -60, -66, -72, -84
GR2AHL-18, -24, -30, -36, -42, -48, -54, -60, -66, -72, -84

GR2AL and GR2AHL

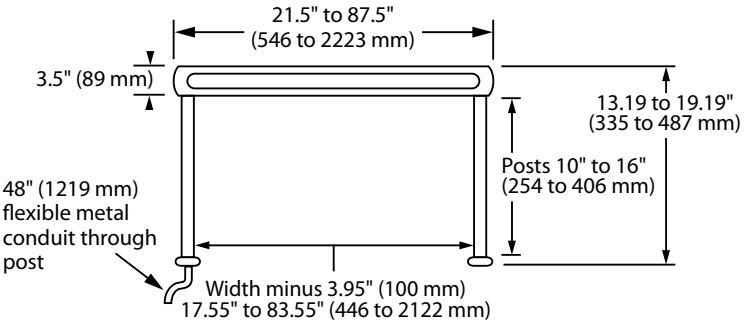

FRONT VIEW

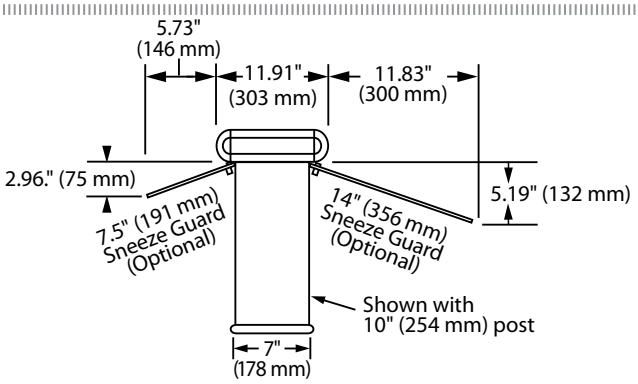

SIDE VIEW

SPECIFICATIONS

Glo-Ray® Infrared *Designer* Aluminum Strip Heaters with Lights

Dimensions (without Non-Adjustable Stands)

Shaded areas contain electrical information for International models only

Standard Watt						High Watt						Both Models
Model	Volts (single phase)	Watt	Amps	Approx. Ship Weight ☗	Number of Bulbs	Model	Volts (single phase)	Watt	Amps	Approx. Ship Weight ☗	Number of Bulbs	Width x Depth x Height
GR2AL-18	120	370	3.1	28 lbs. (13 kg)	2	GR2AHL-18	120	470	3.9	26 lbs. (12 kg)	2	21.5" x 11.91" x 3.5" (546 x 303 x 89 mm)
	120/208		2.2				120/208		2.7			
	120/240		2.0				120/240		2.5			
	220-230 (CE)‡	351-383	1.6-1.7				220-230 (CE)‡	451-493	2.0-2.1			
	230-240 (CE)‡	340-370	1.5-1.5				230-240 (CE)‡	432-470	1.9-2.0			
GR2AL-24	120	470	3.9	24 lbs. (11 kg.)	2	GR2AHL-24	120	620	5.2	24 lbs. (11 kg.)	2	27.5" x 11.91" x 3.5" (699 x 303 x 89 mm)
	120/208		2.7				120/208		3.4			
	120/240		2.5				120/240		3.1			
	220-230 (CE)‡	451-493	2.0-2.1				220-230 (CE)‡	601-657	2.7-2.9			
	230-240 (CE)‡	432-470	1.9-2.0				230-240 (CE)‡	569-620	2.5-2.6			
GR2AL-30	120	570	4.8	29 lbs. (14 kg.)	2	GR2AHL-30	120	780	6.5	29 lbs. (14 kg.)	2	33.5" x 11.91" x 3.5" (851 x 303 x 89 mm)
	120/208		3.2				120/208		4.2			
	120/240		2.9				120/240		3.8			
	220-230 (CE)‡	551-602	2.5-2.6				220-230 (CE)‡	761-831	3.5-3.6			
	230-240 (CE)‡	523-570	2.3-2.4				230-240 (CE)‡	716-780	3.1-3.3			
GR2AL-36	120	755	6.3	33 lbs. (15 kg.)	3	GR2AHL-36	120	980	8.2	33 lbs. (15 kg.)	3	39.5" x 11.91" x 3.5" (1003 x 303 x 89 mm)
	120/208		4.3				120/208		5.3			
	120/240		3.9				120/240		4.8			
	220-230 (CE)‡	726-794	3.3-3.5				220-230 (CE)‡	951-1039	4.3-4.5			
	230-240 (CE)‡	693-755	3.0-3.1				230-240 (CE)‡	900-980	3.9-4.1			
GR2AL-42	120	855	7.1	35 lbs. (16 kg.)	3	GR2AHL-42	120	1130	9.4	35 lbs. (16 kg.)	3	45.5" x 11.91" x 3.5" (1156 x 303 x 89 mm)
	120/208		4.7				120/208		6.1			
	120/240		4.3				120/240		5.5			
	220-230 (CE)‡	826-903	3.8-3.9				220-230 (CE)‡	1101-1203	5.0-5.2			
	230-240 (CE)‡	785-855	3.4-3.6				230-240 (CE)‡	1038-1130	4.5-4.7			
GR2AL-48	120	1040	8.7	36 lbs. (17 kg.)	4	GR2AHL-48	120	1340	11.2	48 lbs. (22 kg.)	4	51.5" x 11.91" x 3.5" (1308 x 303 x 89 mm)
	120/208		5.8				120/208		7.3			
	120/240		5.3				120/240		6.6			
	220-230 (CE)‡	1002-1095	4.6-4.8				220-230 (CE)‡	1302-1423	5.9-6.2			
	230-240 (CE)‡	955-1040	4.2-4.3				230-240 (CE)‡	1230-1340	5.3-5.6			
GR2AL-54	120	1165	9.7	49 lbs. (23 kg.)	4	GR2AHL-54	120	1490	12.4	49 lbs. (23 kg.)	4	57.5" x 11.91" x 3.5" (1460 x 303 x 89 mm)
	120/208		6.4				120/208		8.0			
	120/240		5.9				120/240		7.2			
	220-230 (CE)‡	1127-1232	5.1-5.4				220-230 (CE)‡	1452-1587	6.6-6.9			
	230-240 (CE)‡	1070-1165	4.7-4.9				230-240 (CE)‡	1368-1490	5.9-6.2			

☗ Shipping weight includes packaging, and does not include RMB, must order an RMB.
↗ 120 volt models require additional switches and tandem (end-to-end) elements.
⚮ 120 volt models with infinite controls require additional switch(es) and tandem (end-to-end) elements.
‡ CE approved units for 220–230V utilize a 220V heating system; 230–240V CE units utilize a 240V heating system.
NOTE: Units rated for 120/208 or 120/240 volt are manufactured with a 120 volt circuit for the incandescent lights and a 208 or 240 volt circuit for the heating element(s).

HATCO CORPORATION | P.O. Box 340500 Milwaukee, WI 53234-0500 U.S.A. | (414) 671-6350

www.hatcocorp.com | customerservice@hatcocorp.com | Find a Hatco Rep | Image Library | Document Library

Glo-Ray® Infrared *Designer* Aluminum Strip Heaters with Lights

Models: GR2AL -18, -24, -30, -36, -42, -48, -54, -60, -66, -72, -84
GR2AHL-18, -24, -30, -36, -42, -48, -54, -60, -66, -72, -84

SPECIFICATIONS

Glo-Ray® Infrared *Designer* Aluminum Strip Heaters with Lights

Dimensions (without Non-Adjustable Stands)

Shaded areas contain electrical information for International models only

Standard Watt						High Watt						Both Models
Model	Volts (single phase)	Watt	Amps	Approx. Ship Weight	Number of Bulbs	Model	Volts (single phase)	Watt	Amps	Approx. Ship Weight	Number of Bulbs	Width x Depth x Height
GR2AL-60	120	1350	11.3	54 lbs. (25 kg.)	5	GR2AHL-60	120	1700	14.2	54 lbs. (25 kg.)	5	63.5" x 11.91" x 3.5" (1613 x 303 x 89 mm)
	120/208		7.5				120/208		9.2			
	120/240		6.9				120/240		8.3			
	220-230 (CE)‡	1302-1424	5.9-6.2				220-230 (CE)‡	1652-1806	7.5-7.9			
	230-240 (CE)‡	1240-1350	5.4-5.6				230-240 (CE)‡	1562-1700	6.8-7.1			
GR2AL-66	120	1460	12.2	57 lbs. (26 kg.)	5	GR2AHL-66∞	120	1860	15.5	57 lbs. (26 kg.)	5	69.5" x 11.91" x 3.5" (1765 x 303 x 89 mm)
	120/208		8.1				120/208		10.0			
	120/240		7.3				120/240		9.0			
	220-230 (CE)‡	1412-1544	6.4-6.7				220-230 (CE)‡	1812-1981	8.2-8.6			
	230-240 (CE)‡	1341-1460	5.8-6.1				230-240 (CE)‡	1709-1860	7.4-7.8			
GR2AL-72	120	1635	13.6	58 lbs. (27 kg.)	6	GR2AHL-72∞	120	2085	17.4	58 lbs. (27 kg.)	6	75.5" x 11.91" x 3.5" (1918 x 303 x 89 mm)
	120/208		9.1				120/208		11.3			
	120/240		8.3				120/240		10.2			
	220-230 (CE)‡	1578-1725	7.2-7.5				220-230 (CE)‡	2028-2216	9.2-9.6			
	230-240 (CE)‡	1502-1635	6.5-6.8				230-240 (CE)‡	1915-2085	8.3-8.7			
GR2AL-84∞	120	1920	16.0	62 lbs. (28 kg.)	7	GR2AHL-84↜	120	2320	19.3	62 lbs. (29 kg.)	7	87.5" x 11.91" x 3.5" (2223 x 303 x 89 mm)
	120/208		10.7				120/208	2470	13.4			
	120/240		9.8				120/240	2470	12.0			
	220-230 (CE)‡	1853-2026	8.4-8.8				220-230 (CE)‡	2403-2627	10.9-11.4			
	230-240 (CE)‡	1764-1920	7.7-8.0				230-240 (CE)‡	2268-2470	9.9-10.3			

Shipping weight includes packaging, and does not include RMB, must order an RMB.
↜ 120 volt models require additional switches and tandem (end-to-end) elements.
∞ 120 volt models with infinite controls require additional switch(es) and tandem (end-to-end) elements.
‡ CE approved units for 220–230V utilize a 220V heating system; 230–240V CE units utilize a 240V heating system.
NOTE: Units rated for 120/208 or 120/240 volt are manufactured with a 120 volt circuit for the incandescent lights and a 208 or 240 volt circuit for the heating element(s).

SWITCH LOCATION
Remote only

TOGGLE SWITCH
Amps: Max. 15 amps

INFINITE SWITCH
Max. 12.2 amps

LEADS
5' (1524 mm) through 0.5" (13 mm) conduit in Stand cavity is standard

ELEMENT HEIGHT REQUIREMENTS
(Refer to the Installation section of the Manual on the Hatco website)

Standard Watt
Height: 8"-12" (203-305 mm)
Target Width: 12"-14" (305-356 mm)

High Watt
Height: 11"-14" (279-356 mm)
Target Width: 14"-16" (356-406 mm)

REMOTE CONTROL ENCLOSURES
Must order one RMB control box per Strip Heater - If RMB2 is used, multiple warmers can be controlled from one box.
Click here to go to the Choose Remote Box Configurator (RMB Picker)
or follow this file path: www.hatcocorp.com > Resources > Choose Remote Box

Model	Width	Switches
RMB-3	6" (150 mm)	2 toggles
RMB-7	9.375" (239 mm)	2 toggles with pilot lights or 1 toggle, 1 infinite and pilot light
RMB2-1R	11" (279 mm)	1 toggle, 1 infinite, 1 relay, 1 indicator light
RMB2-2R	14" (356 mm)	1 toggle, 1 infinite, 2 relays, 1 indicator light

PRODUCT SPECS

Designer Infrared Designer Aluminum Foodwarmers with Lights

The Infrared *Designer* Aluminum Foodwarmer with Lights shall be a Glo-Ray®, manufactured by the Hatco Corporation, Milwaukee, WI 53234 U.S.A. The foodwarmer shall be a Glo-Ray model ... , rated at ... watts, ... volts, single phase and be ... inches (millimeters) in overall width. The Glo-Ray shall consist of an aluminum housing and include as standard equipment 14" (356 mm) *Designer* Stands. The infrared heating element shall be tubular metal sheathed. The foodwarmer shall be factory assembled ready for electrical installation.

Options shall include *Designer* Color Housing, *Designer* Color Inset Panel, *Designer* non-adjustable Stands in various sizes (available in *Designer* Colors), Overhead Mounts (available in *Designer* Colors), dark gray *Designer* corner caps, sneeze guards, no Control, no Bulbs, Extra Lamps, Extended Electrical Power Leads, and Remote Control Box. All *Designer* Colors are anti-microbial paint.

Warranty consists of 24/7 parts and service assistance (U.S. and Canada only).